



## 26650 Lithium Ion Power Cell

Nanophosphate® Technology


Lithium Werks' 26650 cells are best for Power.Safety.Life.™ applications. They deliver very high power due to their use of patented Nanophosphate® battery technology. Based on lithium iron phosphate chemistry ( $\text{LiFePO}_4$ ), the cells are inherently safe over a wide range of temperatures and conditions. Whether the application requires outstanding cycle life or stable float reliability, the Lithium Werks' 26650 cells are suitable for a wide variety of power, pulse, or stand-by applications.

Nanophosphate® battery technology offers thermal-stable chemistry, faster charging, consistent output, low capacity loss over time, and superior total cost of ownership (TCO). It provides the foundation for safe systems while meeting the most demanding customer requirements. Multiple layers of protection are employed at the chemistry, cell and system level to achieve an energy storage solution with superior safety and abuse tolerance compared to metal oxide lithium-ion chemistries.


### Applications

- Uninterruptible Power Supplies
- Frequency regulation
- Aviation/Aerospace
- Medical devices
- Engine starting
- Energy storage
- Industrial equipment
- Electrified mobility devices
- Telecom & 5G battery back-up

### Inherent Safety of LFP

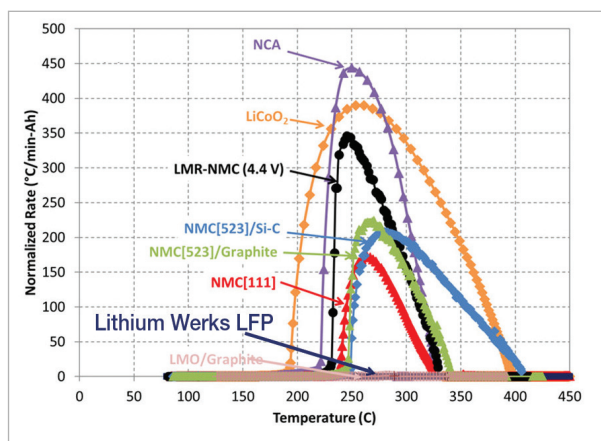

Electro-chemistry	Lithium Werks LFP	NMC (111)	NCA	LiCoO <sub>2</sub>
Thermal Runaway Characteristic	Low-Energy, Non-Propagating	High-Energy, Propagating		
Probability of Propagation	Very Low	Very High (pack-level mitigation required)		
Runaway Onset Temp (°C)	≥210	≥160	≥120	
Peak Thermal Runaway Temp	≈250	≥750		
Peak Rate of Temp Increase (°C/min-Ah)	<2.0	>150	>400	

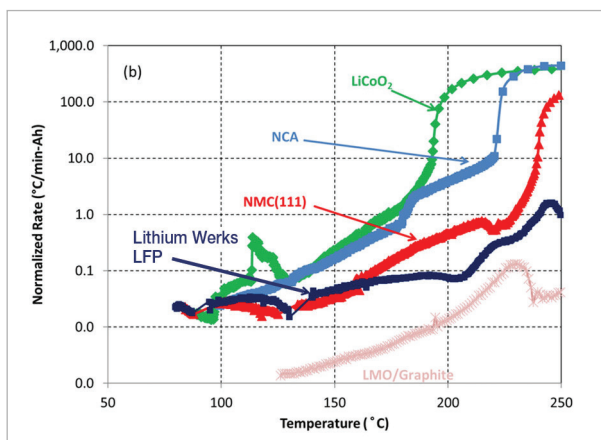



# 26650 Lithium Ion Power Cell

Nanophosphate® Technology


## Specs for ANR26650M1B

Nominal Ratings	
Voltage	3.3 V
Capacity @ 23 °C Typical (Min)	2.6 Ah (2.5 Ah)
Energy @ 23 °C	8.58 Wh
Specific Power @ 25 °C, 2 sec pulse	> 4000 W/kg
Impedance (1KHz AC)	<10 mΩ
Cycle Life at 1C/1C, 100% DOD	> 4000 cycles
Discharging	
Max Continuous Discharge Current	52 A (20C rate)
Max Pulse Discharge Current (10s)	120 A (48C rate)
Minimum Voltage / HPPC Pulse	2 V / 1.6 V
Temperature	-30 °C to 60 °C
Charging	
Recommended Charge Current	3 A (1.2C rate)
Max Continuous Charge Current	26 A (10C rate)
Max Pulse Charge Current (10s)	40 A (15C rate)
Recommended Fast Charge Voltage	3.6 V
Terminate Charge @ 3.6 V	< 50 mA
HPPC Pulse Voltage	3.8 V
Float Charge Voltage	3.5 V
Temperature Range (Charging current at <250mA when under 0°C for some applications)	0 °C to 60 °C
Storage	
Storage Temperature	-40 °C to 70 °C
Mechanical	
Diameter	Ø25.96 +/- 0.5 mm
Length	65.15 +/- 0.5 mm
Mass	76.0 g +/- 1.5 g
Certifications	
Transportation	UN 3480 (UN38.3), CIQ
Safety	UL 1642, UL1973, IEC 62133-2
Environmental	REACH, RoHS, ISO-14001
Quality System	TS/IATF-16949, ISO-9001
Transportation	
Shipping	30% SOC
Part Number 300832-001	

## Cell Data

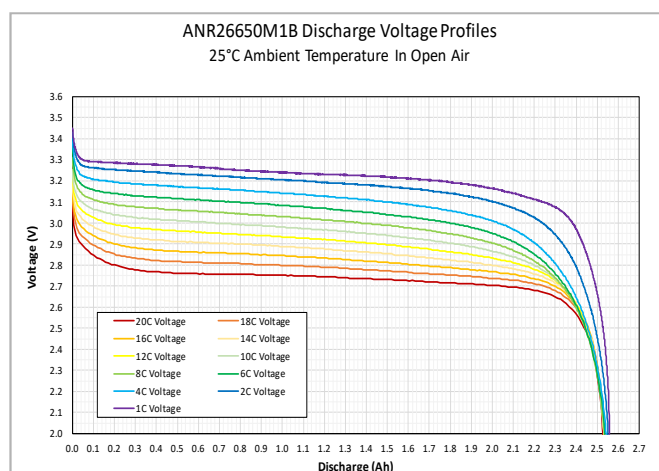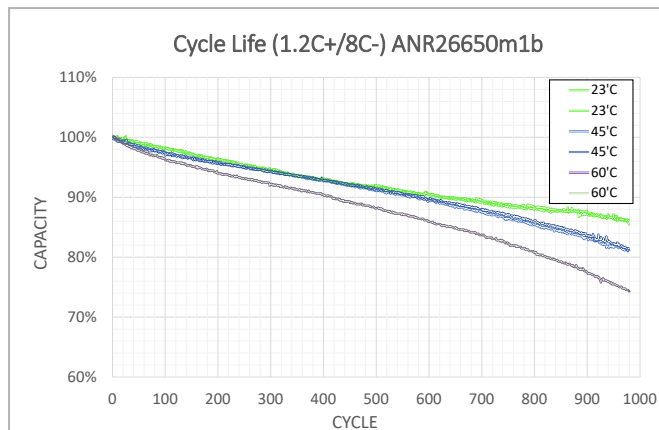

## Dimensions

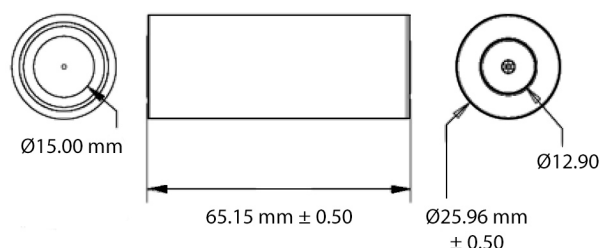

26650 Data Sheet  
Aug 2025  
SF00008 rev 3

**LithiumWerks™**

North American Office  
lithiumwerks.com/contact

European Office  
Tel: +31 412 233065

Copyright © 2025 Reliance Lithium Werks, B.V.  
Performance may vary depending on, but not limited to cell usage and application. If cell is used outside specifications, performance will diminish.